
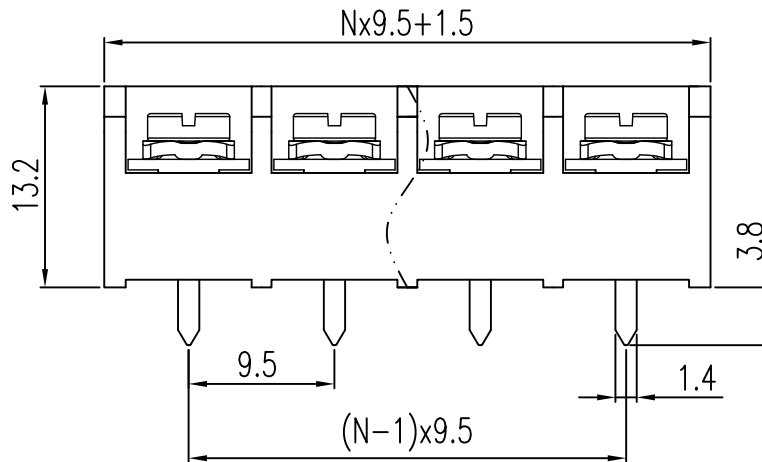
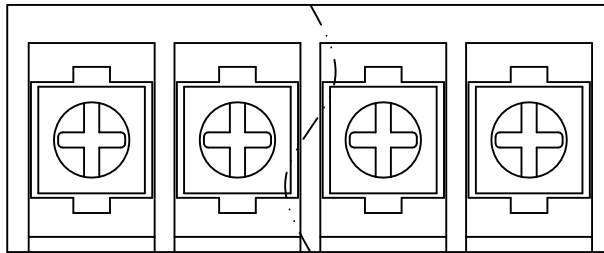
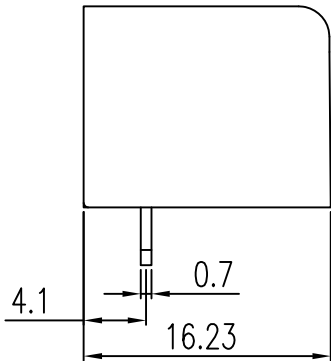


linear dimension(Tolerances Standard GB/T 14486-2008)								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

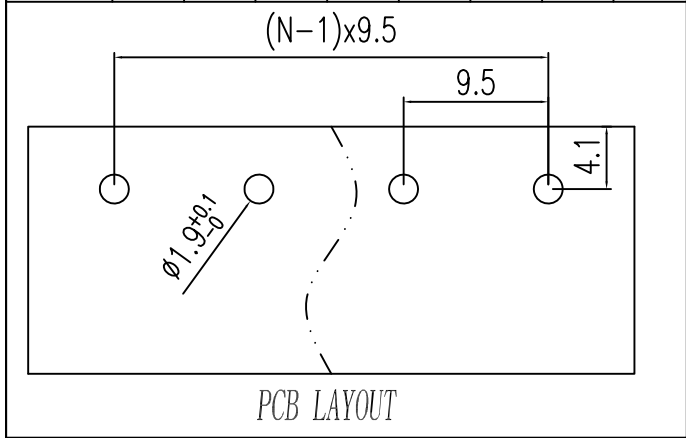

REVISION RECORD				
REV.	DESCRIPTION			
A				

UL/CUL 技术参数 UL/CUL Technical Data			
等 级 Use Group	B	C	D
额定电压 Rated Voltage (V)	300	-	300
额定电流Rated Current (A)	30	-	30
接线范围 Wire Range 单/多芯线 Solid/Stranded (AWG)	18-10		
耐电压withstanding VOLTAGE	3000V/Min		
IEC 技术参数 IEC Technical Data			
过电压类别 Overvoltage Category	III	III	II
污染等级 Contamination Class	3	2	2
额定电压 Rated Voltage (V)	—	—	750
额定电流Rated Current (A)	—		
额定冲击电压 Impulse Withstand voltagea (KV)	—	—	—
导线截面积Conductor cross section 硬质/柔性导线 Solid/flexible (mm ²)			
材 料 Material			
绝缘材料 Insulation Material		PA66	
阻燃等级 Lmflammability		UL94V-0	
导体材料 Contactor Material		铜合金 Copper alloy	
导体表面镀层 Contactive Coating		镀锡 Tin plated	
一般参数 Other Data			
间 距 Pitch (mm)		9.50	
极 数 Poles (P)		2-24	
剥线长度 Stripping Length (mm)		-	
螺丝 Screw/扭矩 Torque (Max) (N.M)		M4.0/1.2	
工作温度Operating temperatur (° C)		-40--+105	
引针尺寸 Pin Dimensions (mm)		3.8	
PCB板孔径 PCB Hole Diameter (mm)		1.9	

DES		CHK		DATE	2015. 2. 25	单位/UNITS	MM	时间/SIZE	A4	比例/SCALE	1:1
		CLB		DATE	2015. 2. 25						
		LF		DATE	2015. 2. 25						
				DATE	2015. 2. 25						



宁波市旭骋电子有限公司
NINGBOSHIXUE ELECTRONIC CO., LTD

第三视角/THIRD ANGLE PROJECTION	版本/REV	A
名称/TITLE	XCHB9500-9.5	